

INDUSTRIÆ Industrial Energy Storage











POWER- AND

GARDENTOOLS





DRIVE SYSTEMS

SYSTEMS

INDUSTRIAL

MEDICAL

Lithium-Ion Battery System FOR INDUSTRIAL APPLICATIONS

TECHNICAL INFORMATION

180S01P BATTERY SYSTE	М
Nominal energy of a single battery block	77,6 kWh
Maximum no. of battery blocks connected into one system	80
Total capacity of the battery system with maximum number of battery blocks connected	6,2 MWh
Configuration	180S02P (15 x 12S02P modules)
Compatibility with the industrial dimensional standard (width x depth x height)	800 mm x 800 mm x 2000 mm + 100 mm (pedestal) (ICT series type: 42U)
Estimated weight of a single battery block	630 kg
Nominal voltage	669 VDC
Output voltage range	606 VDC 778 VDC
External power supply voltage	12 VDC
Maximum discharge current of a single battery block @ 25°C	200 A/350 A (60s), 500A (30s), 700A (10s)
Maximum charging current of a single battery block @ 25°C	116 A/ 175 A (30s), 350 A (10s)
Certification	UN38.3, CE
Operating temperature range	0°C +55°C
Recommended temperture	25°C
Slave ESS block control via data bus	via CAN bus
Communication interface	MODBUS TCP
LCD display with the battery system's current status	7" display in Master ESS
Battery charge indicator of a single battery block	LED indicator
Remote monitoring with event log	(option) – online
Web server	YES
Remote servicing	Software upgrades and system monitoring possible via remote access
Pre-charge	NO - External system required.
IP class	IP55
Depth of Discharge (DoD)	up to 100%
Battery chemistry	Li-ion NMC
Number of cycles	up to 7500

APPLICATIONS

INDUSTRIÆ energy storage systems may be used in a variety of industrial and commercial applications.

Commercial and industrial applications.

INDUSTRIÆ can help energy producers and distributors optimize the investment in energy distribution solutions by storing the energy at times of lower demand and releasing it during peak hours. INDUSTRIÆ is a unique solution for Demand Side Response applications (DSR) to resolve the issues of grid instabilities and support grid balancing.

Off-grid and micro-grid applications

INDUSTRIÆ is an ideal alternative to diesel generators in both industrial, commercial or community applications. The solution may offer flexible and grid-independent power supply connected to renewable energy sources (e.g. solar and/or wind generators) offering reduced maintenance cost and minimized carbon foot-print.

Vehicle charging stations

INDUSTRIÆ as an end-point charging station is the answer to a growing demand for charging personal and commercial electric vehicles. Scalable and flexible configuration of the INDUSTRIÆ may become a large scale charging station for a fleet of e-buses, as well as a smaller, road-side station for electric cars.


Temporary or energy back-up applications

The flexible nature of the INDUSTRIÆ may offer a handful of non-standard applications. Built into a container, the solution can offer temporary power supply of even 1MWh/container.

Possible application may include:

- emergency power supply for industrial or commercial use (e.g. during times of black-out risk)
- power supply to mass events (e.g. concerts, public gatherings, etc)
- mobile power banks (e.g. for maintenance teams of energy distributors or grid operators)
- power supply to remote telecom transmission equipment

SIMPLIFIED INSTALLATION DIAGRAM

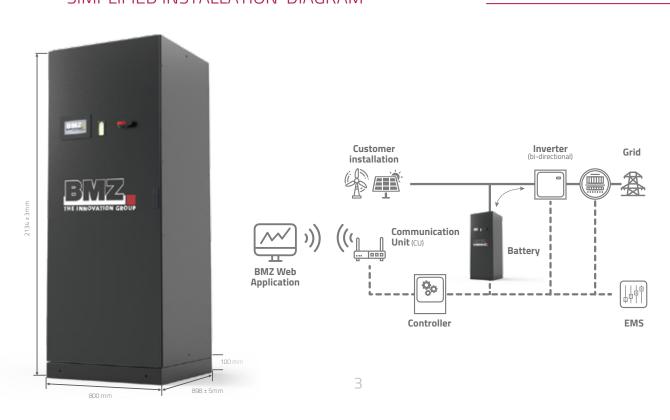

FEATURES

- Master and slave configuration of up to 80 battery blocks connected in parallel
- Real-time monitoring of the battery system's operating status:
- Maximum possible charging current
- Maximum possible discharge current
- Current SOC (State of Charge)
- No. of active batteries
- Real-time value of charge/discharge
- Real-time voltage value
- Remaining capacity of the battery system
- Power consumption meter
- Average temperature / Maximum temperature / Minimum temperature
- Warnings / Errors
- Current operating status (charging, discharging, ready)
- Communication via the MODBUS TCP protocol.
- Monitored data logged and stored on BMZ servers. Web application available to analyze collected data, create reports, graphs, and fault messages.
- Digital outputs facilitating the integration of the battery system with a range of converters.



INVERTER POWER (constant & peak 30s)

	kWh	134 kW 335 kW	268 kW 670 kW	402 kW 1005 kW	536 kW 1340 kW	670 kW 1675 kW	804 kW 2010 kW	938 kW 2345 kW	1072 kW 2680 kW
1x INDUSTRIÆ	78								
2x INDUSTRIÆ	156								
3x INDUSTRIÆ	234								
4x INDUSTRIÆ	312								
5x INDUSTRIÆ	390								
6x INDUSTRIÆ	468								
7x INDUSTRIÆ	546								
8x INDUSTRIÆ	624								

TECHNICAL SPECIFICATIONS OF LITHIUM-ION BATTERY SYSTEM FOR INDUSTRIAL AND COMMERCIAL ENERGY STORAGE

INDUSTRIÆ lithium-ion battery solution is a purpose-designed Industrial Energy Storage System (IESS). Its modular structure offers energy capacity from **77,6 kWh** up to **6,2MWh**. **INDUSTRIÆ** IESS may easily be adapted to a variety of converters and high voltage end-points thanks to MODBUS TCP communication and a number of digital outputs.


To facilitate easy expansion of the system with no modification to control cabling, CAN bus is used for communication between the individual battery blocks. Integrated controls and built-in BMS allow INDUSTRIÆ solution to be installed in applications where energy buffering is required.

The dimensions of an individual battery block complies with the metric standard used in the energy industry.



INDUSTRIÆ APPLICATIONS

Many Environments – One System.

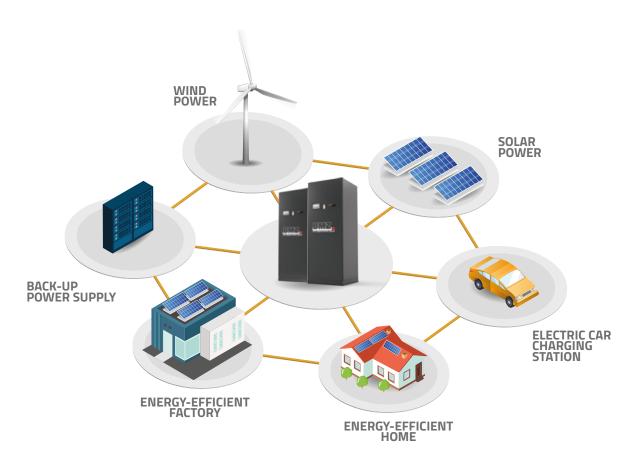

Any questions?

Contact us, we will be pleased to advise you.



Headquarters

BMZ Germany GmbH

Zeche Gustav 1 63791 Karlstein am Main Germany

Phone: +49 6188 9956-0 mail@bmz-group.com

BMZ USA Inc.

1429 Miller Store Road Virginia Beach, VA 23455 USA

Phone: + 1-757 821-8494 contact-usa@bmz-group.com

BMZ Innovation Group Ltd

Future Business Centre Kings Hedges Road Cambridge, CB4 2HY United Kingdom

Phone: +4a4 (0)7391 351787 lukas.gazda@bmz-group.com BMZ Company Ltd.

Julong Technology Building B Cuibao Road, Longgang District, Shenzhen, Guangdong Province P.R.China 518116

Phone: +86 755 8977 5800 contact.cn@bmz-group.com

BMZ Japan KK

Shitaya 1-6-5, Taito-ku, Tokyo, 110-0004 Japan

Phone: +81 35811 1973 Tokio.Kobayashi@bmz-group.com BMZ Poland Sp. z o.o.

Alberta Einsteina 9 44-109 Gliwice Poland

Phone: +48 327842 450 BMZPolandSales@bmz-group.com

BMZ France S.A.R.L.

45 Boulevard Vincent Auriol 75013 Paris France

Phone: +33 9 87 37 42 62 nicolas.noel@bmz-group.com

www.bmz-group.com